




EMBOSSED CARRIER TAPES

Type S Clear Insulative Polystyrene Carrier Tape

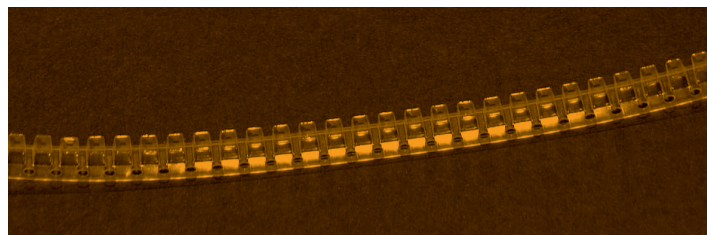

Advantek's Type S Clear Insulative Polystyrene carrier tape is designed for superior performance. Its insulative qualities make it ideal for packaging capacitors and other passive devices. The material's high transparency enables easy in-pocket part inspection, while its uniform surface texture provides a consistently flat sealing area. This specially modified polystyrene offers exceptional strength and stability over time and temperature variations while maintaining flexibility.

Configurations


ADVANTEK Carrier Tape is provided splice-free in any of several reel configurations.

The number of meters of carrier tape that will fit on a given reel is conditional upon the pocket pitch, pocket depth, and reel configuration.

Carrier tape is manufactured in accordance with EIA standards in a range of widths from 8mm to 200mm, depending on the size and orientation of the device being packaged. In addition, carrier tapes are offered in a variety of reel configurations including single-wind and level-wind (cross-wind) format. Standard configuration is single-wind carrier tape on a 22" diameter corrugated paper reel.

Single-wind reel flange diameters available include 13.0", 22.0" (standard) and 30.0". Level-wind reel flange diameters include 14.25" and 22.0". Both corrugated paper and corrugated plastic reel flanges are offered. High impact plastic LOKREEL® packaging reels are available in the 13" diameter format. Standard hub options include inside diameters of 0.5", 1.12" and 3.0" and outside diameters of 4.0", 6.8" and 9.5".

Standard Carrier Tape Dimensions

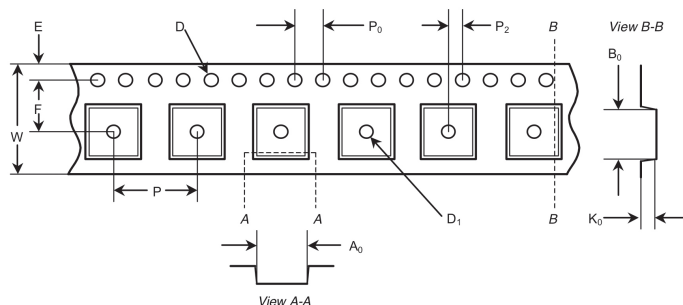

Shelf Life and Storage

We recommend that Advantek Type S carrier tape be used within one year of the date of manufacture. Store this product in its original packaging in a climate-controlled environment where temperature ranges from 21°C +/- 17°C (70°F +/- 30°F). This product is not affected by humidity. Allow the product to stabilize at room temperature prior to use.

Camber

The Advantek Insulative Polystyrene carrier tape meets the EIA-481-D standard for camber that is not greater than 1mm in 250 linear millimeters. For 8mm to 24mm carrier tape in the level wind format, the camber will not be greater than 2mm in 250 linear millimeters.

Material Properties		
Property	Typical Value	Test Method/Standard
Specific Gravity	1.05 g/cc	JIS-K-6911
Tensile Strength	5400 psi, MD 4830 psi, TD	JIS-K-6714
Elongation	MD 40% TD 30%	JIS-K-6714
Tensile Modulus of Elasticity	256,000 psi, MD 242,000 psi, TD	JIS-K-6734
Hardness	85 HRC	ASTM D-785

Note: The values presented for this product are typical laboratory data and may be changed without notice.

Cover Tape Compatibility								
MATERIAL	AA	AHP	ABX	ATA	PS3	APC	AHPC	S
S (Polystyrene)	X		X	X				X



Our wide line of component packaging products offers the flexibility you need to balance price and performance.



ADVANTEK
engineered confidence™

Embossed Carrier Tapes	SFT®	Complex Designs	Basic Designs	Interleaf Tapes		
Cover Tapes	Heat Activated	Pressure Sensitive				
Packaging Reels	Pro	Ultra	Lite	Trimline		
Barrier Bags	DRYLOK®	STATLOK®				
Bands	PROBAND®	LOKBAND®				
Humidity Indicator Cards	1 Spot	3 Spot	4 Spot	6 Spot		
Desiccant	1/3 Unit	1/2 Unit	1 Unit	2 Unit	4 Unit	8 Unit
Dicing Tapes	UV Cured	Non UV Cured				

Germany: +49-761-45546-0
 North America: +1-510-623-1877
 Philippines: +63-49-545-6350
 Singapore: +65-6759-6800
 China: +86-21-5048-4588
 Taiwan: +886-2-2290-1789
 Japan: +81-49-229-5100

advantek.com