




Advantek's Mid-line D-Series Tri-Laminate PS+C (polystyrene with carbon) material provides an economical alternative to the C-Series material. This modified static dissipative polystyrene offers good strength and stability over time and temperature variations. Its uniform surface texture offers a consistently flat sealing area and is suitable for use with a wide variety of pocket designs.

- > Suitable for standard and complex pocket designs
- > Recommended for widths from 8 to 24mm
  - > For widths greater than 24mm, please contact your local Advantek sales representative
- > All Advantek carrier tape is manufactured in accordance with current EIA standards to ensure compatibility with tape and reel equipment

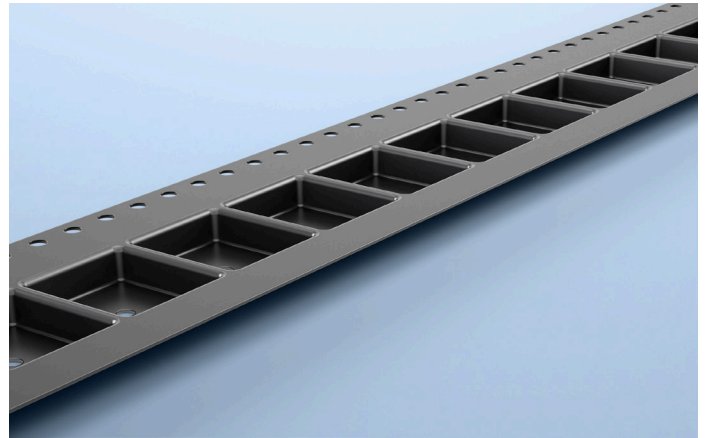

## Material Properties

Property	Value	Test Method
Material Code - Thickness	I - 0.25mm D - 0.30mm	-
Specific Gravity	1.06g/cc	ASTM D792
Tear Strength	LD 0.22 lb	ASTM D1938
Elongation	LD 102.2% TD 68%	ASTM D882
Tensile Strength	LD 3911 psi TD 3071 psi	ASTM D882
Vicat Softening	90°C (194°F)	ASTM D1525
Surface Resistivity	$\geq 10^5$ , $< 10^{12}$ Ohms/Square	ASTM D257

## Shelf Life and Storage

We recommend that Advantek Tri-Laminate PS+C carrier tapes be used within 5 years of the date of manufacture. Store this product in its original packaging in a climate controlled environment where temperature ranges from 21°C +/- 17°C (70°F +/- 30°F). This product is not affected by humidity. Allow the product to stabilize at room temperature prior to use.

## Camber

This Advantek Tri-Laminate PS+C series meets the current EIA-481 standard for camber that is not greater than 1mm in 250 linear millimeters. For 8mm carrier tape in the level wind format, the camber will not be greater than 2mm in 250 linear millimeters.

## Cover Tape Compatibility

Type	Heat Activated								Pressure Activated
	HUB	HUC	HUD	HUE	HUF	AA	HSA	ABx™	PUA
Polystyrene Tri-Lam	✓	✓	✓	✓	✓	✓	✓	✓	✓